







COMPONENTS

<p><b>Handle Fala</b></p>  <p>textile door stop, inserted 14 mm x 4 mm</p> <p>Length: 2.5 m, 2.7 m</p>	<p><b>Top track Simple</b></p>  <p>68 mm</p> <p>Length: 1.5 m, 2.0 m, 2.5 m, 3.0 m, 4.0 m, 6.0 m</p>	<p><b>Bottom track Simple</b></p>  <p>44 mm</p> <p>Length: 1.5 m, 2.0 m, 2.5 m, 3.0 m, 4.0 m, 6.0 m</p>	<p><b>Rubber finishing profile for bottom track</b></p>  <p>Length: 2.0 m, 3.0 m, 6.0 m, 50.0 m</p>	<p><b>Gasket 4 mm</b></p>  <p>4</p> <p>10</p>	<p><b>Gasket 4.5 mm</b></p>  <p>4.5</p> <p>10</p>
<p><b>Top horizontal profile/SIMPLE 10 mid-rail</b></p>  <p>Length: 1.5 m, 2.0 m, 2.5 m, 3.0 m</p>	<p><b>Bottom horizontal profile Simple 10</b></p>  <p>Length: 1.5 m, 2.0 m, 2.5 m, 3.0 m</p>	<p><b>Bottom carriage Simple/Blue 10V</b></p>  <p>(set)</p>	<p><b>Guiding carriage Simple 10 asymmetric</b></p>  <p>(set)</p>	<p><b>Self-tapping screw <math>\varnothing 6.3 \times 32</math></b></p> 	

Dimensions of opening

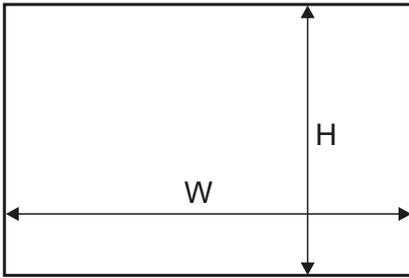


handle length = door height

door filling - # 10 mm board, # 4 mm mirror or # 4.5 mm safety glass


door height	- h	$h = H - 33 \text{ mm}$ $h = H - 39 \text{ mm}$
- without soft-close		
- with soft-close Simple MINI		
board height	- hb	$hb = h - 65 \text{ mm}$
door width	- w	$w = (W - 3 \text{ mm} + Z) : N$
board width	- wb	$wb = w - 17 \text{ mm}$
horizontal profile length	- L	$L = U = w - 33.2 \text{ mm}$
upper horizontal profile length	- U	
mirror height	- hm	$hm = hb$
mirror width	- wm	$wm = wb - 4 \text{ mm}$

number of doors	- N	2	3
total overlap	- Z	30 mm	60 mm

visual design – 4 wings	
	$w = (W + 87) : 4$
	$w = (W : 2 + 27) : 2$

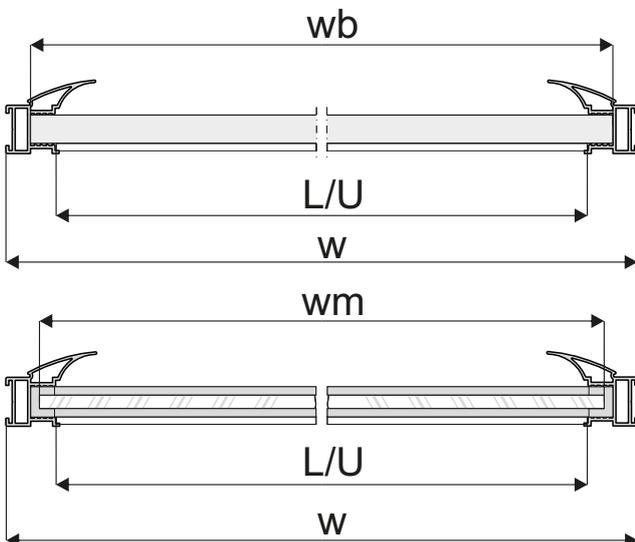


Dimensions helpful during installation of horizontal mid-rails in Simple 10 Frame systems




Installation method for fitting 10 mm board (diag. A) and 4 mm mirror or glass (diag.B)

- with handle




- with top horizontal profile



Expansion gap taken into account when calculating the height of chipboard

- with bottom horizontal profile



**ATTENTION!**

Mirror (4mm) should be used with a safety backing film. Safety glass (4.5mm) comprises of two thin layers with a film in-between. Both mirror and glass need fitting gasket.